


LOCTITE®



**ASSEMBLY AUTOMATION SOLUTIONS
EQUIPMENT CATALOGUE**

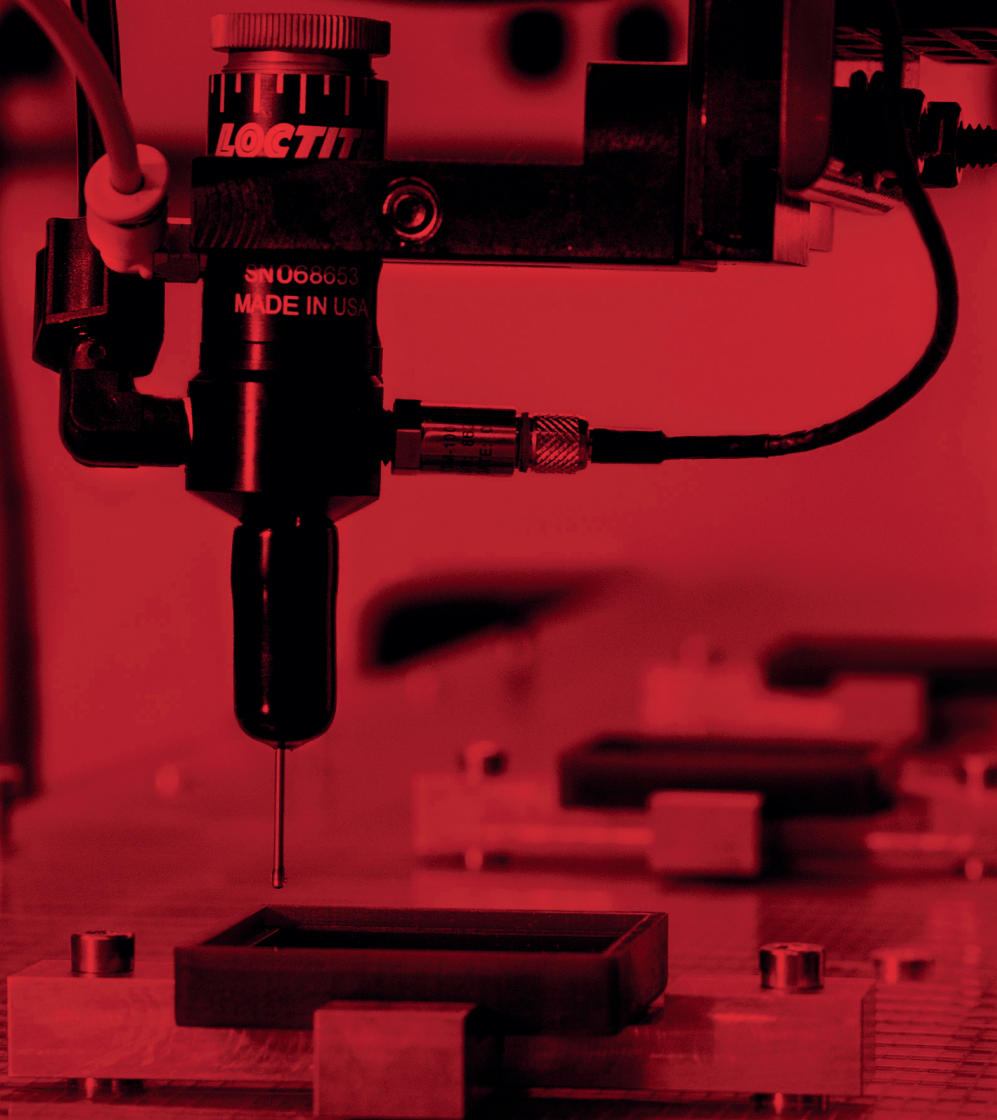

EQUIPMENT + ADHESIVES + EXPERTISE = TOTAL ASSEMBLY SOLUTIONS.

From equipment, to adhesives, to technical support,
your assembly automation needs are fully covered.

Looking for faster, simpler, more effective assembly methods?
LOCTITE supplies total, end-to-end solutions to you.

Advance your assembly processes to the next level with our
complete lineup of easy-to-use dispensing and curing equipment.
Add to that the industry's most comprehensive range of adhesives
for applications ranging from manual to fully-automated.

And, of course, LOCTITE technical support is part of the equation
to help make unlimited manufacturing possibilities.

WHEN WE SAY "TOTAL" WE MEAN IT.



Scan QR code for
additional information.

04

EQUIPMENT SERVICES

A full range of equipment services including factory repairs, field service of LOCTITE brand and other Henkel equipment, rental equipment, and unique engineering services.

06

DISPENSE SYSTEMS

A comprehensive offering of dispensing systems ranging from manual to automated, and suited for an array of adhesive package sizes.

22

AUTOMATED ROBOTIC SYSTEMS

Automated robotic dispensing systems are offered in multiple configurations to meet all your process needs.

26

LIGHT-CURING SYSTEMS

A wide range of LED light-curing systems that provide high power, portability, continuous duty, and long life.

34

CONSUMABLES FOR DISPENSING SYSTEMS

A comprehensive line of LOCTITE dispensing tips and static mix nozzles.

COMPATIBLE ADHESIVE TECHNOLOGIES

LOCTITE equipment is specifically designed to work with our broad range of adhesive solutions.



Anaerobics

AN



Cyanoacrylates

CA



Light-Cures

LC



Silicones

SI



Acrylics

AC



Two Components

2K



EQUIPMENT SERVICES

As a total solutions provider, Henkel's exceptional support network will ensure that all your LOCTITE equipment service needs are met from start to finish. Experienced technical experts are readily available to provide the following and more:

- Product recommendations to ensure the correct equipment is always installed.
- On-site integration and start-up services to support new users.
- Customisation services to ensure LOCTITE equipment solutions fit seamlessly into your process.
- On-site or remote training programs to make sure you have all the information you need to be successful.

Properly maintaining your equipment after installation is critical to achieving top performance. Our equipment experts are also here to offer everything you need to sustain that ongoing performance. The following services are offered to ensure you have all the after-sales support needed:

WARRANTY SUPPORT

Henkel offers a full one-year warranty on all of our equipment. We will ensure you are up and running as soon as possible if there is any issue.

FACTORY REPAIR

If you have LOCTITE equipment in need of repair, Henkel can restore it by using original factory parts, and testing to original quality specifications. All repairs will be handled by our service and repair department in Düsseldorf, Germany.

CALIBRATIONS

Henkel provides calibration services for all of its light meters. All units are also inspected during calibration for any potential repairs. In addition, you can sign up with Henkel for calibration reminders.


FIELD SERVICE

Henkel technicians are available to travel to your location for repair services, preventative maintenance, training, or assistance in setting up a new system.

CUSTOM SPARE PARTS

Custom-order spare parts and accessories are available through the Henkel Equipment Services team. (Standard spare parts are available through traditional purchasing channels.)

DISPENSE SYSTEMS

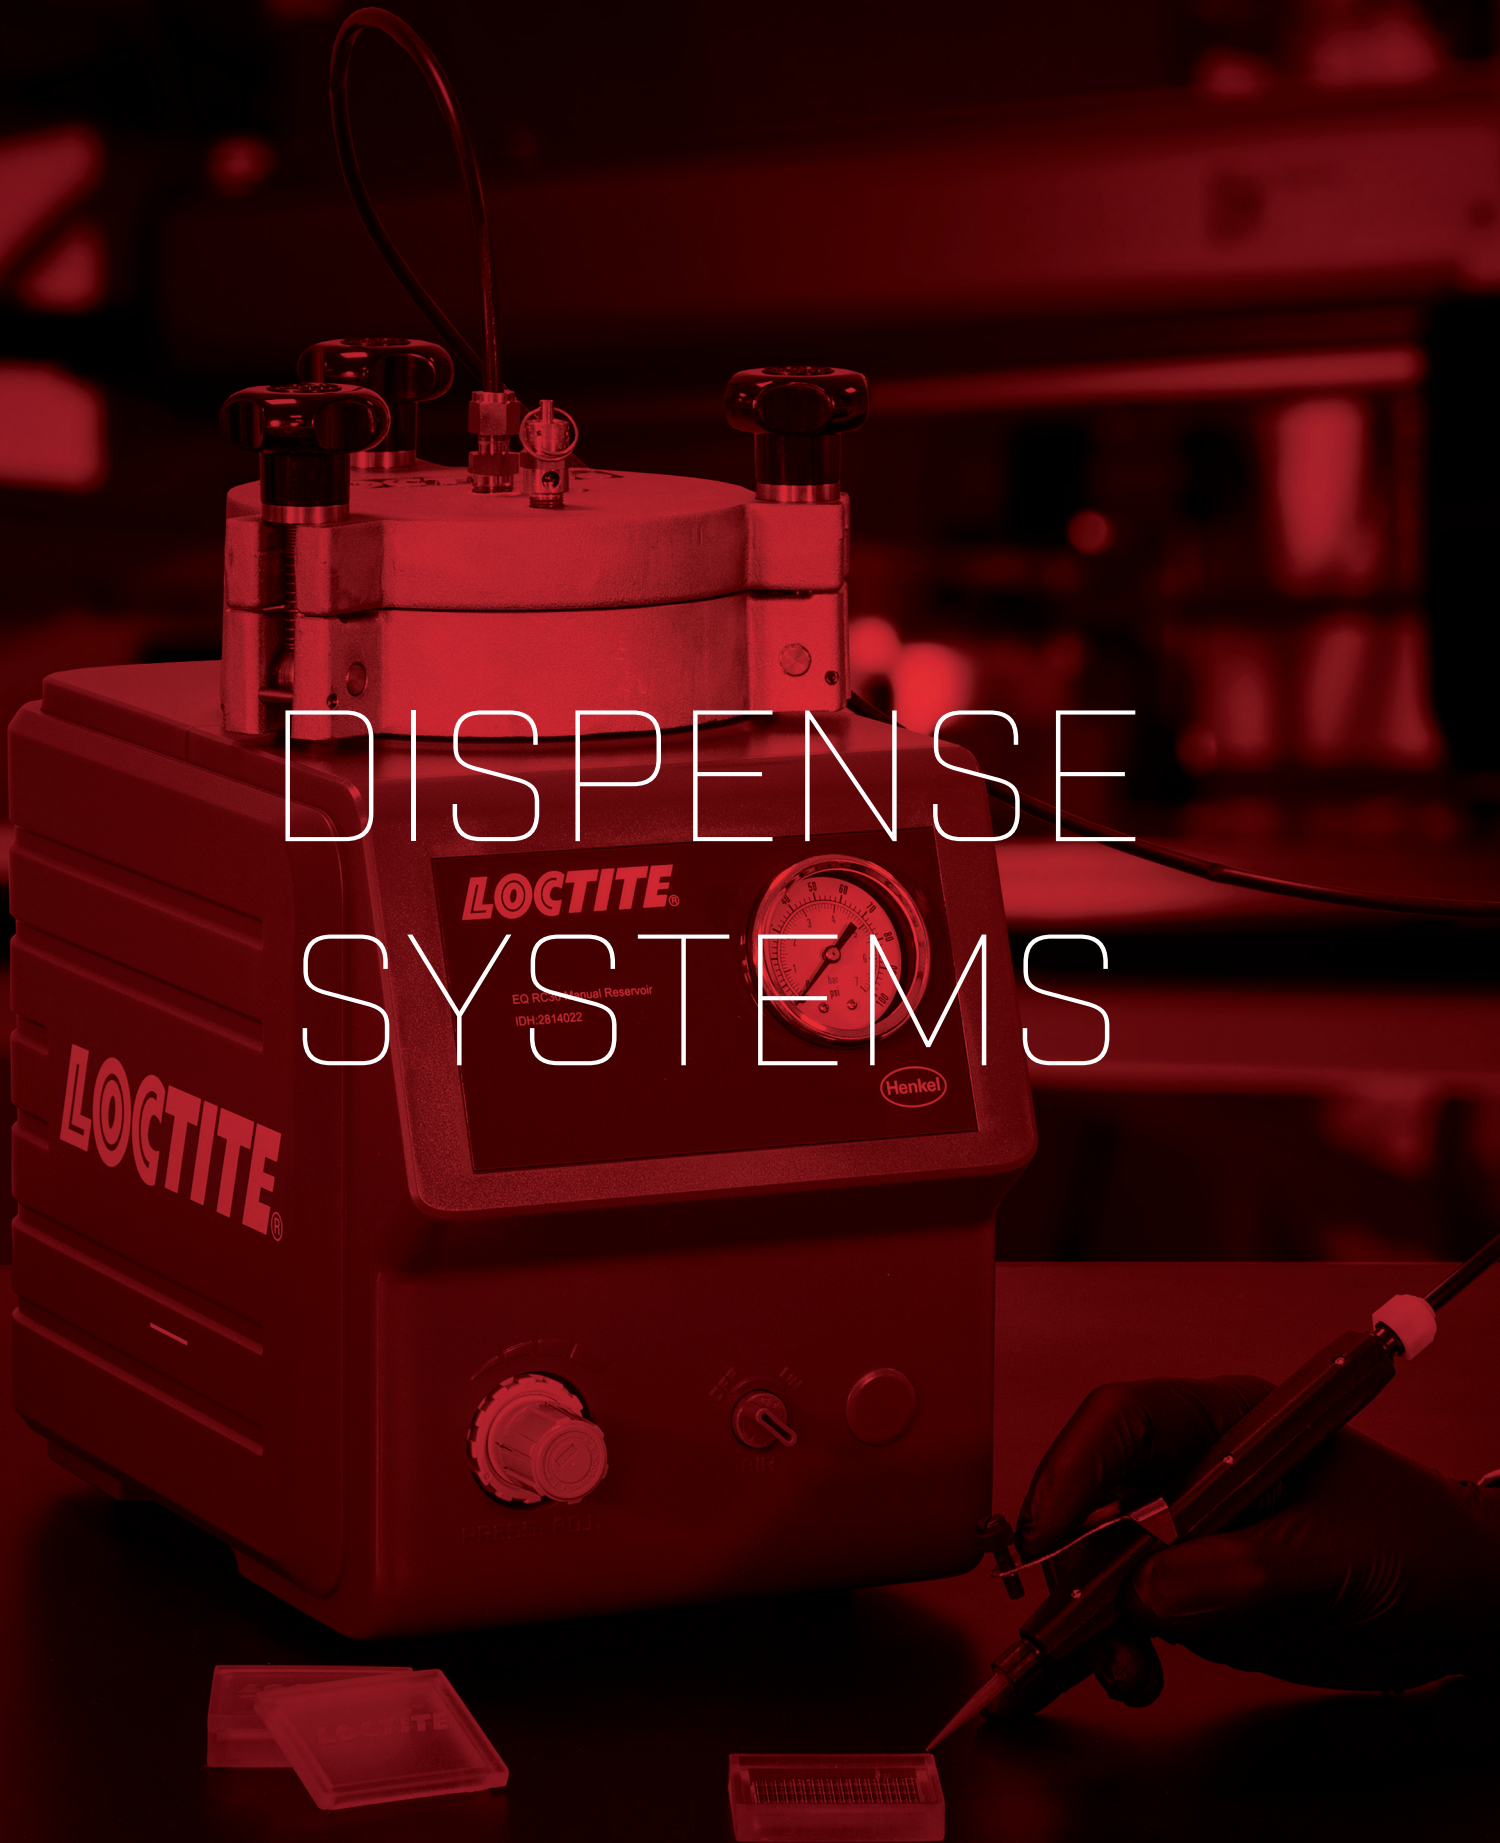

LOCTITE equipment offers high-quality dispensing systems to the marketplace. Henkel’s experience and partnerships between customers, application engineering, and equipment engineering means when you purchase LOCTITE equipment, you get the highest level of expertise, backed by technical service and support unmatched in the industry. The broad range of LOCTITE dispensing systems offers you solutions for an array of adhesive package sizes for various market applications.

Selecting a compatible Dispensing Solution is critical to achieve optimum performance. The primary considerations for selecting a Dispensing Solution include:

Adhesive Chemistry	Adhesive chemistries cure with specific mechanisms or exposure to certain environments.
Package Size and Type	Adhesives are typically offered in various package sizes, depending on shelf life or environmental stability.
Process Requirements (Manual, Semi-Automated, Automated)	Manufacturing process requirements vary in production rate, accuracy / repeatability, part size / geometry, and dispense pattern.

Typical Dispensing Solutions include:

CONTROLLERS & DISPENSE RESERVOIRS

LOCTITE Controllers and Dispense Reservoirs are designed to quickly and easily integrate with each other to deliver a cost-effective solution, as well as improve performance over manual dispensing methods. Compatible with adhesive packs from 50 ml to 2 kg.

DISPENSE VALVES

LOCTITE Dispense Valves for adhesive or fluid delivery are uniquely designed to meet different manufacturing needs, and should be combined with a LOCTITE reservoir and/or a controller.

BOTTLE DISPENSE SYSTEMS

LOCTITE Bottle Dispense Systems are designed to meet demanding manufacturing needs for dispensing adhesives, packaged in a LOCTITE or any other brand bottle.

SYRINGE DISPENSE SYSTEMS

LOCTITE Pneumatic Syringe Dispense Systems can accommodate multiple adhesive package sizes and conveniently dispense with precision and ease.

CARTRIDGE DISPENSE SYSTEMS

LOCTITE Cartridge Dispense Systems are designed to support both handheld or benchtop operations, and allow you to dispense directly from the package with ease.

ANAEROBIC DISPENSE SYSTEMS

LOCTITE Anaerobic Dispense Systems are designed to apply LOCTITE anaerobic products for threadlocking, retaining, and sealing in a wide range of applications – from ID bore coating to gasket making.

VOLUMETRIC DISPENSE SYSTEMS

LOCTITE Volumetric Dispense Systems work with positive displacement technology, as opposed to conventional pressure/time systems, to deliver a high level of precision and accuracy.

RC30 Manual Reservoir

IDH: 2814022

The LOCTITE RC30 Manual Reservoir is suitable for the application of LOCTITE adhesives with a manual applicator at workstations such as in workshops, laboratories, and industrial installations. The reservoir is equipped with a low-level sensor that sends an electronic signal to a LOCTITE controller and is typically integrated into a dispensing system that consists of a dispensing valve and any LOCTITE dispense controller. The reservoir can accommodate most standard LOCTITE adhesive bottles.



FEATURES:

- Cost-effective manual dispensing reservoir for a variety of LOCTITE adhesives.
- Low-level sensor.
- Integrates directly with LOCTITE valves and controllers.

COMPATIBLE ADHESIVE TECHNOLOGIES:



Scan QR code to check out our new how-to-use video.



RC32 / RC34 Automatic Reservoirs

IDH: 2814023 (RC32), 2830690 (RC34)

The LOCTITE RC32 and RC34 Automatic Reservoirs are suitable for the application of LOCTITE adhesives in semi- or fully-automated assembly processes where a LOCTITE controller is already in use. They allow for pressure adjustment and/or management directly from the LOCTITE controller, and include a low-level sensor. The reservoirs can accommodate most standard LOCTITE adhesive bottles.



FEATURES:

- Cost-effective dispensing reservoir for a variety of LOCTITE adhesives.
- RC32 includes single-point, low-level sensor.
- RC34 includes dual-point, low-level sensor.
- Integrates directly with high-functioning LOCTITE controllers.
- Allows for reservoir pressure to be managed by external controller.

COMPATIBLE ADHESIVE TECHNOLOGIES:



Scan QR code to check out our new how-to-use video.



RC40

Integrated Semi-Automatic Dispenser

IDH: 2814025

The LOCTITE RC40 Integrated Semi-Automatic Dispenser combines a dual-channel dispense controller and a reservoir into a single unit. The controller provides two independent digital timing channels that provide control of two pneumatic outputs. These outputs can be used to control dispense valves or any other pneumatic device. The reservoir can accommodate most standard LOCTITE adhesive bottles



FEATURES:

- Integrated reservoir and controller solution in one system.
- Two independent digital timing channels.
- Easy-to-use keypad with LCD display screen for entering values.
- Simple menu-driven commands.

COMPATIBLE ADHESIVE TECHNOLOGIES:



Scan QR code to check out our new how-to-use video.



RC50

Integrated Dispenser

IDH: 2814024

The LOCTITE Pulse RC50 Integrated Dispenser, I4.0, is an enhanced version of the RC40 Integrated Dispenser and offers a digital touch screen for operation, as well as a precision regulator for low-viscosity dispensing. The dispenser is industry 4.0 compatible, providing enhanced communication / connectivity via ethernet or Wi-Fi. The reservoir can accommodate most standard LOCTITE adhesive bottles.



FEATURES:

- Integrated reservoir and controller solution in one system.
- Two independent digital timing channels.
- Easy-to-use, full-colour touch screen.
- The dispenser is industry 4.0 compatible, providing enhanced communication / connectivity via ethernet or Wi-Fi.

COMPATIBLE ADHESIVE TECHNOLOGIES:



Scan QR code to check out our new how-to-use video.



Dual-Channel Controller

IDH: 1275665

The LOCTITE Dual-Channel Controller is a versatile, multi-function controller for actuating one or two dispensing valves, as well as appropriate peripheral equipment, such as an advancing slide, rotorspray, an in-line flow monitor or reservoir. Reservoir pressure is regulated by means of a precision regulator and measured by a digital transducer. This controller can be integrated into fully-automated assembly line operations by means of the PLC interface.



FEATURES:

- Two-channel multi-function controller.
- Digital readout for reservoir pressure, program step number, status of dispense, and dispense time in seconds.
- Four independent dispense programs can be stored in memory.
- Full integration capability into highly-automated production systems.

COMPATIBLE ADHESIVE TECHNOLOGIES:



Industrial Hand Tool Manufacturer Increases Throughput & Quality with a Semi-Automated Adhesive Process.

CUSTOMER CHALLENGE:

An industrial hand tool manufacturer was challenged with the assembly of handle grips onto various tools. The manual process was slow, complex, and not always reliable or repeatable.

HENKEL SOLUTION / BENEFITS:

The use of the **LOCTITE RC40 Integrated Dispenser** along with the **LOCTITE Cyanoacrylate Valve** to apply a toughened **LOCTITE Instant Adhesive** was the solution. The LOCTITE equipment feeds two workstations from one dispense system and applies the adhesive to the tool handles with the following benefits:

- Consistent/repeatable application (scrap rate reduction)
- Automated process (increased productivity)
- Dual application (manual labour reduction)



Photo representative only, not actual application.

Cyanoacrylate Dispense Valve

IDH: 318654

The LOCTITE Cyanoacrylate Dispense Valve is designed for cyanoacrylates, retaining compounds, and threadlockers. It has a small profile and its simple design facilitates field repair. The Cyanoacrylate Dispense Valve can be used with integrated dispense reservoirs to form a complete dispensing system.



FEATURES:

- Specifically designed for the dispensing of LOCTITE cyanoacrylate adhesives.
- Compact size and weight.
- Simple design which facilitates field repair.
- Easy integration with LOCTITE reservoirs and controllers.

COMPATIBLE ADHESIVE TECHNOLOGIES:



Light-Cure Dispense Valve

IDH: 218280

The LOCTITE Light-Cure Dispense Valve is designed for low- to medium-viscosity light-cure acrylics, retaining compounds, and threadlockers. It has a small profile and its simple design facilitates field repair. It can be used with integrated dispense reservoirs to form a complete dispensing system.



FEATURES:

- Specifically designed for the dispensing of LOCTITE light-cure adhesives.
- Compact size and weight.
- Simple design which facilitates field repair.
- Easy integration with LOCTITE reservoirs and controllers.

COMPATIBLE ADHESIVE TECHNOLOGIES:



Stationary Applicator Valves

IDH: 88644 (1/4"), 88645 (3/8")

The LOCTITE Stationary Applicator Valves with a 1/4" or 3/8" feed line are slim, lightweight, patented, no-seal dispense valves. These stationary applicators require a controller and product reservoir and can be used with an integrated dispense reservoir to form a complete dispensing system.



FEATURES:

- Specifically designed for precision dispensing of LOCTITE adhesives.
- Slim, lightweight, no-seal design.
- Adjustable opening and closing speeds for increased dispensing control.
- Easy integration with LOCTITE reservoirs and controllers.

COMPATIBLE ADHESIVE TECHNOLOGIES:



VA40 CA Volumetric Valve

IDH: 2333708

The LOCTITE VA40 CA Volumetric Valve is a positive displacement metering valve which dispenses a precise volumetric drop of adhesive with each cycle. The LOCTITE VA40 is specifically designed to dispense drops of cyanoacrylate with precise dosing in the range of 1,5 to 6 microlitres.



FEATURES:

- Specifically designed for volumetric dot dispensing of LOCTITE cyanoacrylate adhesives.
- Quick and reliable priming.
- Long-life seal design minimises maintenance requirements.
- Easy integration with LOCTITE reservoirs and controllers.

COMPATIBLE ADHESIVE TECHNOLOGIES:



Low-Viscosity Handheld Valve

IDH: 444643

The LOCTITE Low-Viscosity Handheld Valve is a pneumatically-operated, adjustable seat valve designed to be used in conjunction with pressure/time dispense systems. This valve is capable of delivering very small drop sizes, even with low-viscosity products. It can be used especially for cyanoacrylates and other low-pressure applications.

FEATURES:

- Specifically designed for the dispensing of low-viscosity cyanoacrylate and anaerobic adhesives.
- Slim, ergonomic design.
- Ideal for dispensing very small drop sizes.
- Easy integration with LOCTITE reservoirs.



COMPATIBLE ADHESIVE TECHNOLOGIES:



Vari-Drop® Applicator (w/o Tubing and Guards)

IDH: 215996

The LOCTITE Vari-Drop® Applicator is suitable for manually dispensing low- to medium-viscosity LOCTITE products that can be dispensed using pressure/time dispensing. The adjusting screw allows repeatable dispense from light to heavy beads or drops.

FEATURES:

- Specifically designed for the manual dispensing of low- to medium-viscosity LOCTITE adhesives.
- Cost-effective solution for handheld dispensing needs.
- Field-serviceable.
- Easy integration with LOCTITE reservoirs.



COMPATIBLE ADHESIVE TECHNOLOGIES:



PU20 Digital Peristaltic Dispenser

IDH: 2265279

The LOCTITE PU20 Digital Peristaltic Dispenser is a reliable and effective volumetric dispenser for 1K, low-viscosity adhesives. This dispenser is electro-mechanically operated and does not require the use of an air source. Recommended for use with adhesives packaged in 50 ml or smaller bottles.



FEATURES:

- Precise volumetric dispensing of LOCTITE adhesives from small bottles.
- Air-free dispensing eliminates air in product.
- Digital speed adjustment with vacuum suck-back.
- “Teach In” and program memory-saving function.

COMPATIBLE ADHESIVE TECHNOLOGIES:



Pro Pump Handheld Dispenser

IDH: 2564842

The LOCTITE Pro Pump Handheld Dispenser is a bottle-mounted adhesive dispenser that can be used with 50 ml or 250 ml bottles of LOCTITE anaerobic adhesives, creating a complete dispensing system. The ergonomic design allows the user to deliver a drop of adhesive with a single pull of the trigger. The Pro Pump Handheld Dispenser enables more accurate and consistent application while eliminating waste and mess.



FEATURES:

- Turns a bottle of adhesive into a dispensing system.
- Easy to set up and easy to use.
- Compatible with most LOCTITE anaerobic threadlockers and retaining compounds.
- Eliminates spills, waste, and mess.

COMPATIBLE ADHESIVE TECHNOLOGIES:



Medical Device Designer Selects Adhesive & Semi-Automated Equipment for a Consistent, High-Quality Process.

CUSTOMER CHALLENGE:

A designer of a new medical testing device was seeking an assembly solution and process that would be simple to implement, accurate, and reliable. Several assembly methods were under consideration including ultrasonic welding, mechanical fastening, and adhesives.

HENKEL SOLUTION / BENEFITS:

A **LOCTITE Medical Device Grade Instant Adhesive** applied using the **LOCTITE PU20 Digital Peristaltic Dispenser** was selected. The combination equipment and adhesive solution met the designer's requirements with the following benefits:

- Simple, easy to implement (minimal worker training)
- Consistent and repeatable process (accurate for every part)
- Increased reliability (volumetric dispensing of adhesive)



Photo representative only, not actual application.

Telecommunication Manufacturer Improves Field Reliability with a Simple Adhesive Application Solution.

CUSTOMER CHALLENGE:

A manufacturer of exterior telecommunication boxes was experiencing field failures due to corrosion of the fasteners used to assemble the boxes. The boxes needed to be sealed from the elements, but also repairable in the field.

HENKEL SOLUTION / BENEFITS:

The use of the **LOCTITE Pro Pump** to apply **LOCTITE Thread Sealant** was the solution. The combination equipment and adhesive solution was quick and easy to implement and yielded the following benefits:

- Ease of use (simple, manual application)
- Consistent/repeatable application (reliability improvements)
- Neat appearance (no excess sealant)



Photo representative only, not actual application.

All Purpose Syringe Dispenser

IDH: 883976

The LOCTITE All Purpose Syringe Dispenser is a semi-automatic dispensing system designed to dispense LOCTITE adhesives and fluids packaged in 10 and 30 ml syringes, and 300 ml cartridges. The unit has digital timing control for increased precision over typical pressure/time systems.



FEATURES:

- Cost-effective for dispensing LOCTITE adhesives in syringes.
- Simple, easy operation.
- Vacuum suck-back can effectively control product dripping or stringing.
- Easily integrates with other LOCTITE equipment.

COMPATIBLE ADHESIVE TECHNOLOGIES:



Medical Device Manufacturer Reduces Scrap & Increases Throughput with a Fast & Effective Light-Cure Process.

CUSTOMER CHALLENGE:

A manufacturer of a medical monitoring device was experiencing numerous challenges with their manual, room-temperature curing assembly process, ranging from worker fatigue due to the manual process, to variable quality of the end device due to inconsistencies in adhesive application.

HENKEL SOLUTION / BENEFITS:

A **LOCTITE Medical Device Grade Light-Cure Acrylic Adhesive** packaged in a 30 ml syringe, applied using the **LOCTITE Digital Syringe System**, and cured using the **LOCTITE CL40 LED Spot-Curing System**, was the solution. The combination equipment and adhesive resolved the manufacturer's challenges with the following benefits:

- Rapid light-cure (reduced work-in-process and increased throughput)
- Improved worker satisfaction (semi-automated application reduced fatigue)
- Reduced scrap rate (improved reliability and reduced cost)



Photo representative only, not actual application.

HD14 Handheld Manual Dual-Cartridge Dispensers

IDH: 2693822 (200 ml), 2693823 (400 ml)

The LOCTITE HD14 Handheld Manual Dual-Cartridge Dispensers are designed for the manual dispensing of 2K adhesive products packaged in 200 ml or 400 ml cartridges. The dispensers are compatible with all standard product ratios.



FEATURES:

- Cost-effective, handheld manual dispensing of LOCTITE 200 ml and 400 ml 2K adhesives.
- Compatible with various mix ratio LOCTITE adhesives.
- Conversion kit for 1:1, 2:1, 4:1, and 10:1 is included with each dispenser.

COMPATIBLE ADHESIVE TECHNOLOGIES:



HD14 Handheld Pneumatic Dual-Cartridge Dispensers

IDH: 2693824 (200 ml), 2693825 (400 ml)

The LOCTITE HD14 Handheld Pneumatic Dual-Cartridge Dispensers are designed for the pneumatic dispensing of 2K adhesive products packaged in 200 ml or 400 ml cartridges. The dispenser is compatible with all standard product ratios and offers improved consistency over manual options.



FEATURES:

- Cost-effective, handheld pneumatic dispensing of LOCTITE 200 ml and 400 ml 2K adhesives.
- Compatible with various mix ratio LOCTITE adhesives.
- Conversion kit for 1:1, 2:1, 4:1, and 10:1 is included with each dispenser.

COMPATIBLE ADHESIVE TECHNOLOGIES:



50 ml Handheld Manual Dispenser

IDH: 267452

The LOCTITE 50 ml Dual-Cartridge Manual Applicator is a handheld, manually operated meter mix dispenser. The dispenser provides a convenient, cost-effective method to apply adhesives and sealants with minimal waste. The dispensers are compatible with 1:1 and 2:1 mix ratio products, as well as products packaged in 10:1 B-Style cartridges.



FEATURES:

- Cost-effective, handheld manual dispensing of LOCTITE 50 ml 2K adhesives.
- Compatible with various mix ratio LOCTITE adhesives.
- Kit includes 1:1, 2:1, and 10:1 plungers.

COMPATIBLE ADHESIVE TECHNOLOGIES:



300 ml Handheld Pneumatic Dispenser

IDH: 88632

The LOCTITE 97002 Handheld Pneumatic Dispenser is designed for the pneumatic dispensing of 1K adhesive products in 250 ml tubes and 300 ml cartridges. It is a manually controlled, pneumatically operated unit. The amount and rate is controlled by the operator.



FEATURES:

- Rapid-loading system to make cartridge changes clean and easy.
- Ergonomically designed.
- Simple and clean dispensing.

COMPATIBLE ADHESIVE TECHNOLOGIES:



LOCTITE Electric Rotorspray

IDH: 135557

LOCTITE Rotorspray Systems are designed to apply adhesives and sealants to the interior cylindrical surfaces of workpieces. The special design of the drive assembly and rotor housing ensures that the Rotorspray is completely sealed to prevent contamination with adhesive.



FEATURES:

- Application of LOCTITE adhesives to interior cylindrical surfaces.
- Integrates directly with LOCTITE valves and controllers.
- Multiple size spinners available for a variety of applications.

COMPATIBLE ADHESIVE TECHNOLOGIES:



Commercial Appliance Electric Motor Improved with Adhesive Sealing Solution.

CUSTOMER CHALLENGE:

A commercial appliance manufacturer was challenged with the assembly of electric motors where complete sealing, a neat appearance, and a high throughput were required.

HENKEL SOLUTION / BENEFITS:

The use of a **LOCTITE Anaerobic Adhesive/Sealant** in combination with the **LOCTITE Rotorspray Applicator** was the solution. The **LOCTITE Rotorspray Applicator** applies the adhesive/sealant to the interior diameter of the rotor with the following benefits:

- Uniform application (complete seal)
- Neat appearance (no excess adhesive/sealant)
- Automated process (increased productivity and improved reliability)



Photo representative only, not actual application.

Pro Pump Handheld Dispenser

IDH: 2564842

The LOCTITE Pro Pump Handheld Dispenser is a bottle-mounted adhesive dispenser that can be used with 50 ml or 250 ml bottles of LOCTITE anaerobic adhesives, creating a complete dispensing system. The ergonomic design allows the user to deliver a drop of adhesive with a single pull of the trigger. The Pro Pump Handheld Dispenser enables more accurate and consistent application while eliminating waste and mess.



FEATURES:

- Turns a bottle of adhesive into a dispensing system.
- Easy to set up and easy to use.
- Compatible with all LOCTITE anaerobic threadlockers and retaining compounds.
- Eliminates spills, waste, and mess.

COMPATIBLE ADHESIVE TECHNOLOGIES:



PU20 Digital Peristaltic Dispenser

IDH: 2265279

The LOCTITE PU20 Digital Peristaltic Dispenser is a reliable and effective volumetric dispenser for 1K, low-viscosity adhesives. This dispenser is electro-mechanically operated and does not require the use of an air source. Recommended for use with adhesives packaged in 50 ml or smaller bottles.



FEATURES:

- Precise volumetric dispensing of LOCTITE adhesives from small bottles.
- Air-free dispensing eliminates air in product.
- Digital speed adjustment with vacuum suck-back.
- “Teach In” and program memory-saving function.

COMPATIBLE ADHESIVE TECHNOLOGIES:



RC15 Compact Rotor Pump System

The LOCTITE Rotor Pump System is a volumetric displacement system that provides a high level of repeatability and accuracy for bead, drop, or potting applications. The system can also be used with the LOCTITE Electric Rotorspray.

RC15 Compact Rotor Pump Controller

IDH: 1880232

The LOCTITE RC15 Pump Controller is designed for the precise control of the Compact Micro Rotor Pump Dispenser 1.0 and the Compact Rotor Pump Dispenser 4.0. Three programs can be stored in the RC15 Pump Controller for different dispensing applications. There are three different modes of operation (Quantity, Time, Start/Stop), which can be set up easily using the touch screen.



Compact Micro Rotor Pump 1.0

IDH: 1741601

The LOCTITE Compact Micro Rotor Pump Dispenser 1.0 applies LOCTITE adhesives out of a reservoir with high repeatability. Ideal for small drop and bead dispensing, delivering a flow rate of up to 1,5 ml/min. This volumetric dispenser is a rotating displacement system and consists of a rotor and stator. This Rotor Pump requires the RC15 Rotor Pump Controller to form a complete dispensing system.



Compact Rotor Pump 4.0

IDH: 1196160

The LOCTITE Compact Rotor Pump Dispenser 4.0 applies LOCTITE adhesives out of a reservoir with high repeatability. Ideal for small to medium drop and bead dispensing, delivering a flow rate of up to 6 ml/min. This volumetric dispenser is a rotating displacement system and consists of a rotor and stator. This Rotor Pump requires the RC15 Rotor Pump Controller to form a complete dispensing system.



FEATURES:

- Specifically designed for volumetric dispensing of dots and beads of LOCTITE adhesives.
- Capable of dispensing low- to high-viscosity adhesives.
- Multiple pump sizes available dependent on flow rate requirements.
- Easy integration with LOCTITE reservoirs and controllers.

COMPATIBLE ADHESIVE TECHNOLOGIES:



LOCTITE
EQ RB40 400D
Benchtop Robot

AUTOMATED ROBOTIC SYSTEMS



POWER PURGE PRO



LOCTITE Automated Robotic Dispensing Systems are cost-effective solutions designed to simplify the dispensing of adhesives and sealants onto various surface configurations, ranging from simple to complex. Dispensing Robots allow manufacturers to repeatedly and reliably dispense patterns of liquid materials on a programmed basis, resulting in improved process efficiencies, minimal material waste, and reduced manufacturing costs. Automated dispensing systems are offered in multiple configurations to meet all your process needs.

WHY USE A ROBOTIC DISPENSING SYSTEM?

BENEFITS OF ROBOTIC DISPENSING

Precision Application

Robotic Dispensing ensures that adhesive is applied in the correct location on the part.

Repeatability

Dispensing Robots will dispense in the same location every time, reducing part-to-part variation typically seen in manual processes.

Complexity

Robots are capable of consistently applying beads of adhesive in difficult shapes and patterns, which may not be possible via manual application.

Speed

High-speed dispensing can be achieved while still maintaining performance requirements.

Quality

A properly-controlled dispensing process will minimise waste/scrap, while ensuring performance, aesthetics, and the overall quality of the assembled part.

Ease of Installation

Dispensing Robots are suitable for all production environments, integrate directly with other LOCTITE equipment, require minimal operator dependency, and are offered in multiple configurations to meet different process needs.

RB40 Dispensing Robots

The LOCTITE RB40 Benchtop Dispensing Robots are available in four ranges of operation from 200 x 200 x 50 mm up to 500 x 500 x 100 mm (X,Y,Z) and have features and accessories that are custom-tailored for adhesive dispensing processes. These benchtop robots have 3-axis control, and each robot has an integral I/O connector for external light curtain (sold separately) or external E-stop integration. The Teach Pendant, dispensing equipment, cables, and mounting hardware must also be purchased separately.

RB40 200 D-Series Benchtop Robot

IDH: 2104801

The LOCTITE RB40 200 D-Series Dispensing Robot has a **200 x 200 x 50 mm** range of operation (X,Y,Z), and has features and accessories that are custom-tailored for adhesive dispensing processes.



RB40 300 D-Series Benchtop Robot

IDH: 2104799

The LOCTITE RB40 300 D-Series Dispensing Robot has a **300 x 300 x 100 mm** range of operation (X,Y,Z), and has features and accessories that are custom-tailored for adhesive dispensing processes.

RB40 400 D-Series Benchtop Robot

IDH: 2104795

The LOCTITE RB40 400 D-Series Dispensing Robot has a **400 x 400 x 100 mm** range of operation (X,Y,Z), and has features and accessories that are custom-tailored for adhesive dispensing processes.



RB40 500 D-Series Benchtop Robot

IDH: 2103369

The LOCTITE RB40 500 D-Series Dispensing Robot has a **500 x 500 x 100 mm** range of operation (X,Y,Z), and has features and accessories that are custom-tailored for adhesive dispensing processes.

FEATURES:

- Designed for adhesive dispensing within a working area up to 500 mm x 500 mm x 100 mm.
- Integrated solution – plug-and-play with LOCTITE equipment solutions and accessories.
- Easy to program via Teach Pendant, and stores up to 100 programs.
- A wide variety of mounting hardware is available.

COMPATIBLE ADHESIVE TECHNOLOGIES:



Sensor Manufacturer Implements Semi-Automated Adhesive Application Process to Improve Quality & Reliability.

CUSTOMER CHALLENGE:

A sensor manufacturer was manually applying LOCTITE Instant Adhesives onto small sensors for attachment to an aluminium plate. The process was challenged with consistency, accuracy, and contamination issues.

HENKEL SOLUTION / BENEFITS:

A combination assembly automation solution, including a **LOCTITE RC50 Integrated Dispenser**, **VA40 CA Valve**, and **RB40 300 D-Series Robot**, was developed to meet the assembly requirements and deliver the following benefits:

- Reduced adhesive and manual labour usage (cost savings)
- Improved quality and reliability (accurate, repeatable dispense)
- Increased throughput (fast application process)



Photo representative only, not actual application.

LED Lighting Manufacturer Selects Adhesive & Automated Equipment for Rapid Process Time & High-Quality.

CUSTOMER CHALLENGE:

An LED manufacturer was designing a new LED light fixture. The assembly solution needed to provide a complete seal of the components, as well as allow for rapid manufacturing in order to keep up with market demand.


HENKEL SOLUTION / BENEFITS:

A semi-automated adhesive application and curing station was the solution. A **LOCTITE Light-Cure Acrylic Adhesive** is dispensed using the **LOCTITE RC50 Integrated Dispenser**, **Light-Cure Valve** and **RB40 500 D-Series Robot**. This system enables rapid and accurate adhesive application to the various complex geometries, which are then cured using the **LOCTITE CL42 LED Flood-Curing System**. This total solution delivers the following benefits:

- Improved quality and reliability (accurate, repeatable dispense)
- Increased throughput (fast application and cure process)
- Cost savings (labour and failure rate reduction)



Photo representative only, not actual application.

A hand wearing a black glove holds a red LOCTITE light-curing torch. The torch is pointed towards a clear plastic assembly consisting of a rectangular base with a smaller rectangular component on top. The scene is set against a dark background with a red glow from the torch. The text "LOCTITE" and "Order No. 2182210" is visible on the side of the torch. The main title "LIGHT-CURING SYSTEMS" is overlaid in white text.

LIGHT-CURING SYSTEMS

Henkel offers innovative LOCTITE LED Light-Curing Systems that provide high power, portability, continuous duty, and long life. A wide range of systems are available – handheld point, spot wand, and flood systems – offering maximum flexibility for any application. These light sources are optimised for curing our extensive line of UV/Visible light-curing adhesive products, to provide optimal solutions for nearly every process need.

Key benefits of LED-curing systems versus traditional bulb technology include:



Long life – Up to 20.000 hours of operation (10x longer than typical UV bulbs) with minimal decay over time.



Environmental benefit (no mercury).



Instant on/off – No warm-up like traditional UV systems.



Low maintenance cost (no replacement bulbs).



Zero infrared emissions, reducing part heating (warping) to an absolute minimum.



Low energy consumption.



100% of LED light output is within the usable curing spectrum.



Low cost of ownership.

Process Control and Monitoring Systems for Light-Curing Systems

Henkel offers a full range of radiometers that can be used with all of our light-curing systems, to ensure the proper intensities are delivered consistently during your production process. These tools are used in conjunction with light-curing equipment to ensure a consistent process and the highest level of quality.



CL30 LED Flood-Curing System

The LOCTITE CL30 System is a high intensity LED flood system specifically designed to cure LOCTITE light-cure adhesives. The large area flood allows for easy curing of large part assemblies and the LED heads can be stacked in both the X and Y directions, further expanding the curing area if needed. The system can be easily integrated into either benchtop or fully-automated processes.

CL30 LED Flood Quad Controller

IDH: 2257357

The LOCTITE CL30 LED Quad Controller operates up to four LED flood heads. It has three different control modes: 1) Timer Mode: Adjustable from 0 to 999 seconds; 2) Level Mode: To set up intensity percentage for each channel; and 3) Advance Mode: Operator needs to define Step, Intensity, and Time.



CL30 LED Flood Single Controller

IDH: 1359255

This LOCTITE CL30 LED Flood-Curing Single Controller supplies electrical power to one LOCTITE CL30 LED Flood Array Light Source. It controls the time that the LED is kept on during the cure cycle.



CL30 LED Flood Array Light Sources

IDH: 2139182 (365 nm), 2139180 (405 nm)

The LOCTITE CL30 LED Flood Array Light Sources are offered in 365 and 405 nm wavelengths. Each CL30 head is equipped with 144 high-power LEDs and integrated reflectors, providing uniform curing across a wide area (100 mm x 100 mm). The Light Sources can also be stacked side-by-side in two directions, further expanding the curing area for maximum flexibility.



FEATURES:

- LED flood-curing system offering long-life, energy-efficient, instant on/off performance.
- Simple and easy control of one to four LED flood heads.
- Large cure area (100 mm x 100 mm).
- Resistive colour touch screen for ease of operation.
- LED heads stackable in both X and Y directions.

COMPATIBLE ADHESIVE TECHNOLOGIES:



CL42 LED Flood-Curing System

The LOCTITE CL42 System is a high intensity LED flood system specifically designed to cure LOCTITE light-cure adhesives. The large area flood allows for easy curing of large part assemblies and the LED heads can be stacked side-by-side, further expanding the curing area if needed. The system can be easily integrated into either benchtop or fully-automated processes.

CL42 Dual LED Controller

IDH: 2804957

The LOCTITE CL42 Dual LED Controller operates up to two LED flood heads. It can be operated in a continuous light output mode, or up to a 7-step, programmed output mode, where the light output intensity and time can be programmed for each separate LED head.



CL42 LED Flood Array Light Sources

IDH: 2804955 (365 nm), 2804956 (405 nm)

The LOCTITE CL42 LED Flood Array Light Sources are offered in either 365 or 405 nm wavelengths. Each CL42 head is equipped with 120 high-power LEDs and integrated reflectors, providing uniform curing across a wide area (100 mm x 100 mm).



CL42 LED Flood Chamber

IDH: 2804959

The LOCTITE CL42 LED Flood-Curing Chamber has been designed especially for use with the LOCTITE CL42 LED Flood-Curing System to cure UV and Visible Light-Cure Adhesives. It consists of a chamber with an adapter for one or two LED light sources, workpiece holder, door safety system, ESD safe door with window, and a controller connection.



Scan QR code to check out our new how-to-use video.



FEATURES:

- LED flood-curing system offering long-life, energy-efficient, instant on/off performance.
- Connect up to two LED flood heads.
- Intensity adjustment for each channel.
- Large cure area (100 mm x 100 mm).
- LED heads side-by-side stackable.

COMPATIBLE ADHESIVE TECHNOLOGIES:



CL40 LED Spot-Curing System

The LOCTITE CL40 LED Spot-Cure System offers a cost-effective, high-output solution for all your light-curing needs. Its compact size and multi-channel design offer a high level of flexibility for integrating into most manufacturing processes. The system provides all the benefits of LED technology while maintaining one of the highest intensity outputs available.

CL40 LED Spot Quad Controller

IDH: 2804936

The LOCTITE CL40 LED Spot-Curing Quad Controller operates up to four CL40 LED Light Sources. It can be operated in a continuous light output mode, or up to a 10-step, programmed output mode, where the light output intensity and time can be programmed for each separate LED head.



CL40 LED Spot Light Sources

IDH: 2804938 (365 nm), 2804937 (405 nm)

The LOCTITE CL40 LED Spot-Curing Light Sources are used to cure UV and Visible Light-Cure Adhesives. They are available in 365 nm and 405 nm wavelengths.



Scan QR code to check out our new how-to-use video.



FEATURES:

- LED spot-curing system offering long-life, energy-efficient, instant on/off performance.
- Operates up to four LED heads.
- Compact LED head design.
- Intensity adjustment for each channel.
- Resistive colour touch screen for ease of operation.

COMPATIBLE ADHESIVE TECHNOLOGIES:



CL32 LED Spot Handheld Light Sources

IDH: 2182210 (365 nm), 2182207 (405 nm)

The LOCTITE CL32 LED Spot-Curing Light Sources are cost-effective, high-powered, portable LED light sources that offer a high level of flexibility for UV or Visible light-curing needs. The lightweight, compact design helps minimise operator fatigue, while its small size and long focus length make it perfect for applications in hard-to-reach bond areas. Usable as a handheld or stationary mount, this system is perfect for prototyping, scale-up, or full production environments.



FEATURES:

- LED handheld spot-curing system offering long-life, energy-efficient, instant on/off performance.
- High intensity.
- Battery-powered with long battery life.
- Small, compact, ergonomic design.

COMPATIBLE ADHESIVE TECHNOLOGIES:



Process Control & Monitoring Systems

PM20 UV VIS and UV A/B Radiometers

IDH: 2436352 (UV VIS), 2436353 (UV A/B)

The LOCTITE PM20 UV VIS Radiometer and LOCTITE PM20 UV A/B Radiometer are an industry-first for measurement of LED light-curing devices. The PM20 UV VIS Radiometer is used to measure LED light-curing devices that emit primarily in the Visible wavelengths, while the PM20 UV A/B Radiometer is used to measure LED light-curing devices that emit in the UVA and UVB wavelengths. These radiometers can also be used with curing chambers, conveyors, and flood lamps. Each of the radiometers combines all-in-one exposure, intensity measurement, and profile memory capability into one device.



FEATURES:

- Specifically designed for use with LOCTITE LED and bulb-based curing systems.
- Digital display of peak intensity and total exposure.
- Graphical display of intensity vs. time.
- Exportable data file.

COMPATIBLE ADHESIVE TECHNOLOGIES:



Protective Equipment Manufacturer Speeds Output & Quality of Face Shields with Adhesive Assembly Process.

CUSTOMER CHALLENGE:

A personal protective equipment manufacturer needed to increase throughput of its high-demand face shields. The previous assembly method was slow and required parts to sit to cure sufficiently. The manual process also resulted in variable quality and failure rates.

HENKEL SOLUTION / BENEFITS:

A **LOCTITE Light-Curing Instant Adhesive** in conjunction with **LOCTITE dispensing and LED curing equipment** provided the design and manufacturing flexibility that was needed. The adhesive is dispensed using a simple, easy-to-use **LOCTITE RC30 Reservoir and Vari-Drop® Valve**. The face shields are then cured using the **LOCTITE CL30 Flood System with Quad Controller**. This total solution delivered the following benefits:

- Increased throughput (very rapid cure process)
- High reliability and repeatability (adhesive and equipment performance)
- Improved quality (accuracy in adhesive placement and cure)



Photo representative only, not actual application.

Plastic Water Pitcher Manufacturer Implements Adhesive Assembly Process for Design & Manufacturing Flexibility.

CUSTOMER CHALLENGE:

A manufacturer of plastic water pitchers had previously used ultrasonic welding for their assemblies. As new designs came on-line, the manufacturer was required to adapt the welding equipment to accommodate. In addition, to keep up with production requirements, multiple assembly lines and personnel were required.

HENKEL SOLUTION / BENEFITS:

A **LOCTITE Light-Curing Acrylic Adhesive** is dispensed in the varying patterns required using a **LOCTITE RC40 Integrated Dispenser, Light-Cure Dispense Valve** and **RB40 200-D Series Automated Dispensing Robot**, and then cured with the **LOCTITE CL40 LED Spot-Curing System**. Four **LED Spot Light Sources** are positioned around the part and controlled simultaneously using the **LED Spot Quad Controller**. This total solution delivered the following benefits:

- Flexibility in design
(the adhesive and equipment can be quickly adapted to changes in design)
- Increased production (rapid cure and semi-automated process)
- Improved quality and reliability (accurate, repeatable dispense)



Photo representative only, not actual application.

A worker wearing a dark cap and a light-colored long-sleeved shirt is applying a substance from a dispensing system onto a metal part. The scene is illuminated with a strong red light, creating a monochromatic effect. The worker's hands are visible, and the dispensing system is positioned above the metal part. The background shows industrial equipment and a blurred sign.

CONSUMABLES FOR DISPENSING SYSTEMS

Henkel offers a comprehensive line of LOCTITE dispense tips and static mix nozzles. All are uniquely tailored to LOCTITE equipment and adhesive technologies, so you have a reliable and complete process in place. A wide variety of tips and mix nozzles are available to meet all of your adhesive dispensing needs.



NEEDLE TIPS

Our high-precision stainless steel, tapered polyethylene and flexible polypropylene dispensing needles/dispensing tips all feature a positive locking, helical thread design to ensure the tip will stay intact during the toughest applications.




MIX NOZZLES

Choosing the correct mix nozzle is a critical step in ensuring your 2K adhesive is properly mixed during the dispense cycle. LOCTITE consumables offer a wide variety of static mix nozzles that have been carefully tested to provide the best performance with our LOCTITE adhesive products. These are offered in many configurations for compatibility with the wide range of cartridge sizes and styles that are available.

CONSUMABLES FOR DISPENSING SYSTEMS

FLEXIBLE DISPENSING TIPS: DISPENSING NEEDLE, POLYPROPYLENE (PPF), HELICAL THREAD

Illustration / Example	Item No.	Order No.	Pack Size	Colour	Gauge	Inner Ø, mm
	97229	142640	50 pcs	Amber	15	1.37
	97230	142641	50 pcs	Green	18	0.84
	97231	142642	50 pcs	Pink	20	0.61
	97232	142643	50 pcs	Red	25	0.25

TAPERED DISPENSING TIPS: DISPENSING NEEDLE, POLYETHYLENE - CONICAL (PPC), LUER-LOCK

Illustration / Example	Item No.	Order No.	Pack Size	Colour	Gauge	Inner Ø, mm
	97221	88660	50 pcs	Grey	16	1.19
	97222	88661	50 pcs	Green	18	0.84
	97223	88662	50 pcs	Pink	20	0.61
	97224	88663	50 pcs	Blue	22	0.41

HIGH PRECISION DISPENSING TIPS: DISPENSING NEEDLE, STAINLESS STEEL STANDARD (SSS), LUER-LOCK

Illustration / Example	Item No.	Order No.	Pack Size	Colour	Gauge	Inner Ø, mm
	97225	88664	50 pcs	Amber	15	1.37
	97226	88665	50 pcs	Green	18	0.84
	97227	88666	50 pcs	Pink	20	0.61
	97228	88667	50 pcs	Red	25	0.25

ADDITIONAL DISPENSING TIPS AND MIXER NOZZLES

Illustration	Item No.	Order No.	Pack Size	Description
	98741	1146079	50 pcs	Dispensing needle, stainless steel – PTFE-lined (SSTL), 25 gauge
	97262	218288	2 each	Needle selection pack: 2 each of a variety of dispensing needles
	97248	218275	50 pcs	Luer-Lock® tip caps
	97233	88672	20 + 5 pcs	Luer-Lock® adapter kit: 20 Luer-Locks® and 5 adapters
	97207	88656	40 pcs	10 ml clear syringe barrel kit

Deviations in form and colour are possible without impact on the performance.

ADDITIONAL DISPENSING TIPS AND MIXER NOZZLES

Illustration	Item No.	Order No.	Pack Size	Description
	97263	218287	40 pcs	10 ml black syringe barrel kit, for UV and light cure adhesives
	97208	88657	2 pcs	10 ml syringe airline adapter
	97244	88677	20 pcs	30 ml clear syringe barrel kit
	97264	218286	20 pcs	30 ml black syringe barrel kit, for UV and light cure adhesives
	97245	88678	2 pcs	30 ml syringe airline adapter
	97290	397462	50 pcs	All plastic precision dispensing tip, 20 gauge
	n.a.	2900614	12 pcs	Static mixer for epoxy and PU in 50 ml, SQ 24
	984570	1487439	10 pcs	Static mixer for epoxy in 200 / 400 ml, SQ 7.5-24
	1034575	1034575	10 pcs	Static mixer MBX 6.5-20-S 10:1 for LOCTITE AA 3038
	n.a.	2447734	10 pcs	Spray mix nozzle for LOCTITE PC 7255 MFQ-08-24C-13
	8953186	1104046	10 pcs	Static mixer 4:1 / 10:1 for 400 / 490 ml, MCX 08-18
	n.a.	1646832	10 pcs	Static mixer 1:1 for acrylics in 50 ml, MAH 05-07 (i.e. LOCTITE AA 3295)
	98457	720174	10 pcs	Static mixer 1:1 / 2:1 in 200 / 400 ml, MC 8-24
	863585	367545	10 pcs	Static mixer 1:1 for MS polymers in 410 ml, MC 13-18
	8953187	1104047	10 pcs	Static mixer 4:1 / 10:1 in 400 / 490 ml, MCX 08-24
	8955989	1453183	10 pcs	Static mixer for LOCTITE 3090 and LOCTITE 4070, MLX 2.5-16-5
	n.a.	1826921	10 pcs	Static mixer 1:1 / 2:1 in 50 ml, MBH 3.2-16 S
	n.a.	1573153	10 pcs	Static mixer 1:1 / 2:1 in 50 ml, MBQ 5.0-24 L
	n.a.	1573135	10 pcs	Static mixer 1:1 / 2:1 in 400 ml, MFH 6.0-34 T


Notes

Notes

LOCTITE®

Henkel Ltd

Wood Lane End
Hemel Hempstead
Hertfordshire HP2 4RQ
Tel.: (+44) 1442 278 100
Fax: (+44) 1442 278 071
www.henkel-adhesives.co.uk
www.henkel.co.uk

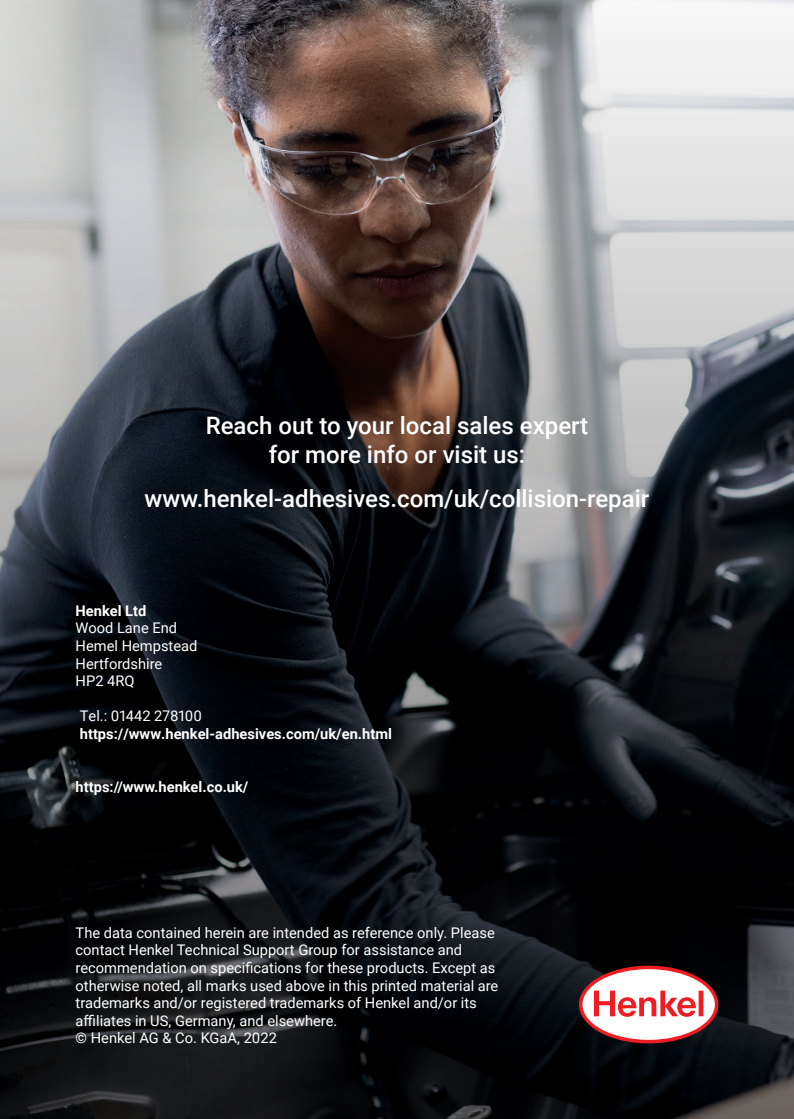

Reach out to your local sales expert
for more info or visit us:

www.henkel-adhesives.com/uk/collision-repair

Henkel Ltd
Wood Lane End
Hemel Hempstead
Hertfordshire
HP2 4RQ

Tel.: 01442 278100

<https://www.henkel-adhesives.com/uk/en.html>

<https://www.henkel.co.uk/>

The data contained herein are intended as reference only. Please contact Henkel Technical Support Group for assistance and recommendation on specifications for these products. Except as otherwise noted, all marks used above in this printed material are trademarks and/or registered trademarks of Henkel and/or its affiliates in US, Germany, and elsewhere.

© Henkel AG & Co. KGaA, 2022



TEROSON®

***COLLISION
REPAIR
ESSENTIALS***



TEROSON IS MADE FOR PROFESSIONALS.

The resourceful men and women who use their hands to repair vehicles to the highest standard. Who hold true to their craft and never back down from a professional challenge. Those who constantly raise the bar to set new industry standards.

MADE FOR **PROFESSIONALS**



With over 120 years of history, TEROSON enables these dedicated professionals to transform damaged vehicles and return them to pre-crash standards. TEROSON Collision Repair is a line of solutions used for bonding, coating, sealing, acoustics, stiffening and reinforcing. These solutions are reliable. They are safe. They last. They improve efficiency and they are simple to use.

REBUILD

Common tasks that involve rebuilding OEM seams, metal or plastic parts. The adhesive range for rebuilding is broad and mainly chosen based on the substrate(s) that need to be rebuilt. Common technologies are MS, EP and PU. Remember: Rebuilding is often a time- and resource-saving alternative to replacing parts.


REPLACE

Structural damage requires cutting out old parts and replacing them with new ones. Due to the size of the replaced parts, and the need to retain the structural integrity of the car, high-strength, structural bonding power is needed. This is the premium class within collision repair and requires comprehensive knowledge and practice to re-establish original structural integrity.


REPAIR

Small repair tasks. The things that can be fixed relatively easily, e.g. bumper repair, broken bumper clips, or components of similar complexity. These can be solved quickly with a selection of TEROSON solutions for smart repair.


Note: Small repair tasks are also referred to as “smart repair”.

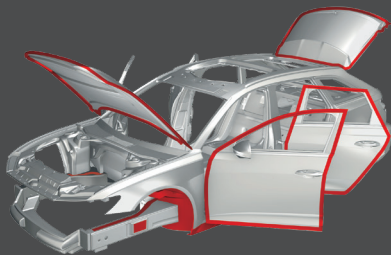

e.g. TEROSON MS 9320 SF

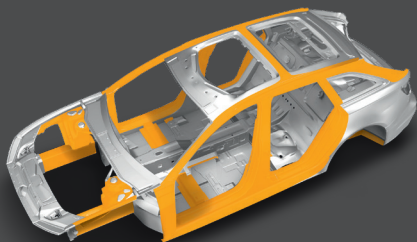

e.g. TEROSON EP 5065

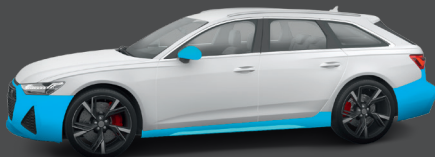

e.g. TEROSON PU 9225 SF ME

TABLE OF CONTENTS

REBUILD

8 Seam Sealing

TEROSON MS 9320 SF	8
--------------------------	---

10 Metal Rebuild

TEROSON EP 5020 TR	10
--------------------------	----

12 Coating

TEROSON RB R2000 HS.....	12
--------------------------	----

TEROSON WT S3000 AQUA.....	13
----------------------------	----

REPLACE

14 Panel/Structural Bonding

TEROSON EP 5055.....	14
----------------------	----

TEROSON EP 5065	15
-----------------------	----

18 NVH (Noise Vibration Harshness)/Anti-Flutter

TEROSON MS 222.....	18
---------------------	----

TEROSON BT SP 200.....	19
------------------------	----

TEROSON PU 9500	20
-----------------------	----

REPAIR

22 Plastic Repair/Hybrids

LOCTITE 3090	22
LOCTITE HY 4070	23

24 Smart Repair

TEROSON 150	24
TEROSON PU 9225 SF ME	25

26 Body Filler

TEROSON UP 210	26
TEROSON UP 250	27
TEROSON UP 270	28

CLEANING

30 Cleaning and Priming

TEROSON VR 10	30
BONDERITE M-NT 1455	33

EQUIPMENT

34 Equipment

Guns and supporting tools	34
---------------------------------	----

TEROSON MS 9320 SF





Six Finishes, One Product

TEROSON MS 9320 SF is a solvent- and isocyanate-free, silane-modified polymer for the reproduction of flat- and wide-stream seams equal to OEM texture. Fast skin formation time: 10 to 20 min. Best application results with: TEROSON ET POWERLINE II PISTOL or TEROSON ET AIR MULTIPRESS PISTOL for sprayable sealing. Surface preparation with TEROSON VR 10 recommended.

- **Unique application system to reproduce flat- and wide-stream beads equal to OEM texture** refinish
- **Sprayable and brushable**
- **Very good adhesion to a wide range of substrates, without primer**
- **Excellent UV resistance and weathering performance**
- **Wet-on-wet paintable**
- **Save up to 25% of rebuild time***

* Based on an average time of 120 min. / repair



TEROSON EP 5020 TR

Time is money – save both

TEROSON EP 5020 TR is a unique, cold-applied, 2-component, epoxy-based, adhesive for rebuilding metal surfaces such as vehicle shells or car bodies made from steel or aluminium. It is designed to rebuild the original shape of damaged car body parts. The product is applied with LOCTITE HAND GUN, with mixing ratio 2:1. Reduced curing time with IR heater at 60 °C.

- **Fast 2-component epoxy**
- **Lead-free alternative to tin soldering**
- **Outstanding sandability**
- **Excellent sag resistance**
- **Time-saving, no need to dismantle parts**
- **No shrinkage**





TEROSON RB R2000 HS

OEM-quality textures

TEROSON RB R2000 HS is a rubber- and resin-based, overpaintable coating product for preserving and complementing existing underbody coatings and spot repairs. Enhances abrasion resistance on visible underbody car parts. Reproduces OEM textures and is compatible with all OEM coatings. Use with TEROSON UNIVERSAL UBC PISTOL or TEROSON STANDARD UBC PISTOL.

- Reproduces OEM textures
- Extended life for underbody protection
- Coating of primed, surfaced metals or painted parts
- Overpaintable
- High solid content
- Flexible properties even in cold conditions
- Available in water based solution



TEROSON WT S3000 AQUA

Excellent abrasion resistance

TEROSON WT S3000 AQUA is a water-based coating product for underbody stone chip protection. Ideal for reproducing OEM textures. Overpaintable, VOC-free, low odour. OEM specified. Easy application with TEROSON UNIVERSAL UBC PISTOL or TEROSON STANDARD UBC PISTOL. Recommended surface treatment with TEROSON VR 10.

- Excellent abrasion resistance for stone chip and underbody coating
- Reproduces all different kinds of OEM textures
- High sag resistance
- UV stable and overpaintable
- No shrinkage, no cracking
- Compatible with OEM PVC coatings
- Sandable



TEROSON EP 5055

Perfect for roofs and panels

TEROSON EP 5055 is a 2-component, high-strength, solvent-free, epoxy-based, structural bonding adhesive with excellent corrosion protection properties for bonding metal (coated and uncoated), e.g. steel, aluminium or sheet moulding compounds. It is ideal for roof, door and panel bonding. The product exhibits excellent corrosion prevention and spot-weldable properties. It is necessary to use an application tool with piston rod, e.g. the Teroson ET STAKU HAND PISTOL or the Teroson ET POWERLINE II PISTOL. Surface preparation with Teroson VR 10 recommended.

- Provides body stiffness mainly for NVH purposes & weld reduction
- Adheres to a wide range of materials (without primer) such as aluminium, steel and sheet moulding compounds
- Excellent corrosion prevention
- OEM approved
- Spot weldable, in a wet state

TEROSON EP 5065



Impact resistant – superlative safety

TEROSON EP 5065 is a 2-component, high-strength, impact-resistant, solvent-free, epoxy resin-based adhesive. It has high-impact wedge-peel strength at high and low temperatures (-40 to +80 °C). It is used in car repair for critical structural safety parts when crash behaviour requirements are high (e.g. car body steel with or without e-coat, galvanised steel and aluminium, A&B pillars, suspension turrets and floor members). It provides corrosion protection. It is necessary to use an application tool with piston rod, e.g. the TEROSON ET STAKU HAND PISTOL or the TEROSON ET POWERLINE II PISTOL. Surface preparation with TEROSON VR 10 recommended.

- **High crash safety at different temperatures**
- **Adheres to a wide range of materials (without primer) such as aluminium, steel and sheet moulding compounds**
- **Excellent corrosion prevention**
- **OEM approved**
- **Spot weldable, in a wet state**







TEROSON MS 222

Anti-Flutter

TEROSON MS 222 is a beige, 1-part, solvent-free, odourless, gun-grade, thixotropic, moisture-cured sealant based on silane modified polymer. It cures to a soft elastic product. Skin-formation and curing times are dependent on humidity, temperature and joint depth. It is free of isocyanates, silicones and PVC. Application areas include roof bars, door bars, stiffeners and inner frames.

- Free of isocyanates, silicone and PVC
- Solvent-free
- Gun-grade
- Cures to a soft, elastic product
- Low modulus

TEROSON BT SP 200



Stops airborne noise in its tracks

TEROSON BT SP 200 is a high-quality, sound-deadening, foam mat with PU protective skin for damping air-borne sound in the bonnet and luggage compartment. The mat is pressure-sensitive and coated on one side with a protective polyurethane skin. The product is flame retardant and resistant to oil, fuel, heat and water. Surface preparation with Teroson VR 10 recommended.

- Flexible when heated
- Conforms to body panel shapes when heated
- Flows into ribbings and corners when heated
- Adhesion: pressure-sensitive/self-adhesive



TEROSON PU 9500

The perfect seal – blocks noise, water, dust

TEROSON PU 9500 FOAM is a sound-deadening, 2-component, polyurethane foam for A-, B-, and C-pillars, door sills, and frame structures. Ideal for refixing preformed acoustic parts. Surface preparation with TEROSON VR 10 recommended.

- **Sound insulation:** Blocks the passage of airborne noise in hollow cavities
- **Prevents noise, vibration and harshness (NVH)**
- **Provides a complete seal against water and dust**
- **Flame retardent**
- **Adhesion: self-adhesive/foaming**
- **OEM specified**



LOCTITE 3090



Ultra fast, ultra precise

LOCTITE 3090 is a 2-component, fast-curing, gap-filling adhesive with excellent bonding characteristics, making it suitable for a variety of substrates incl. plastics, rubbers and metals. It is designed for the assembly of parts with varying or undefined bond gaps up to 5 mm, or for applications where the complete cure of excess adhesive is a must. The gel consistency prevents adhesive flow even on vertical surfaces.

- **Fast curing**
- **Gap fill: up to 5 mm**
- **Gel-based: non-drip formula allowing vertical and overhead application**
- **Perfect for all quick repairs**
- **Excellent bonding of all common substrates (metals, most plastics, rubber, wood, paper, etc.)**
- **Temperature resistance from -40 to +80 °C**

LOCTITE HY 4070



Most versatile adhesive in your toolbox

LOCTITE HY 4070 is a 2-part, transparent, colourless to pale yellow, cyanoacrylate/acrylic hybrid, universal bonder. Provides fast fixture at room temperature in bond gaps up to 5 mm. It works well on various substrates including most plastics, rubbers and metals. It is used where complete cure of excess adhesive as well as temperature and moisture resistance is required.

- **Non-sag**
- **Gel consistency prevents adhesive flow, even on vertical surfaces.**
- **Gap fill: up to 5 mm**
- **Moisture resistant**
- **Temperature resistance from -40 to +100 °C**
- **Bonds multiple substrates including plastics, rubbers, and metal**


TEROSON 150



For superior adhesion

TEROSON 150 is used on plastic parts to improve the adhesion performance of plastic repair adhesives (TEROSON PU 9225 SF/UF/ME) and plastic filler product (TEROSON UP 250) prior to painting. The primer is easily applied with a spray can.

- Excellent adhesion promoter/primer for paintable plastic parts, plastic filler products and similar
- Easy to use
- Short flash-off time



TEROSON

PU 9225 SF ME

Kunststoff-Reparatur-Klebstoff

Base: 2 Komponenten Polyurethan

Plastic Repair Sealant

Base: Two-component polyurethane

Colle de réparation pour plastiques

Base: polyuréthane bi-composants

TEROSON PU 9225 SF ME

A smart, speedy solution for plastic repair

TEROSON PU 9225 SF ME is a 2-component, fast-curing, repair adhesive. It is typically used for repair tasks on paintable interior and exterior plastic parts, mainly for smaller damages on bumpers, spoilers etc. Thanks to micro-emission properties, MDI (monomeric diisocyanate) content is < 0.1%. The product can be cured with IR heater at 60 °C. Easy application with the TEROSON HAND PISTOL (50 ml cartridges) and an appropriate static mixer. Surface preparation with TEROSON VR 10 recommended.

- Super fast 2-component polyurethane
- Superior adhesion on plastics (use adhesion promoter TEROSON 150)
- Excellent sandability
- Improved health & safety due to micro-emission properties
- Overpaintable with all car paint systems (use adhesion promoter)



TEROSON UP 210

Your universal filler for everyday use

TEROSON UP 210 is a premium, everyday, unsaturated, polyester body filler used for filling dents and gives a perfect surface before painting. It repairs dents, scratches, pinholes and other imperfections, as well as being suitable for reshaping. It is suitable for use on steel, aluminium, galvanised surfaces and glass fibre.

- Suitable for reshaping
- Gives a perfect surface before painting
- Premium, everyday body filler



TEROSON UP 250

Designed for paintable plastic parts

TEROSON UP 250 is an elastic, unsaturated, polyester body filler which is suitable for all types of paintable plastic repairs. It repairs scratches, imperfections and is suitable for use in reshaping of bumpers. It can be used on paintable plastic parts and is perfect for skimming repairs made with TEROSON plastic repair products such as TEROSON PU 9225 SF/UF/ME.

- Suitable for reshaping
- Gives a perfect surface before painting
- Premium, everyday body filler
- Flexible

TEROSON UP 270



A smooth operator

TEROSON UP 270 is a super smooth, easy-to-spread, unsaturated, polyester body filler with low viscosity and self-leveling properties. It repairs scratches, pinholes and other imperfections. It can be used on steel, aluminium, galvanised surfaces and glass fibre.

- Easy to spread
- Super smooth
- Self-leveling properties
- Low viscosity

A middle-aged man with short, light brown hair and a slight smile, wearing a black long-sleeved shirt. He has his arms crossed and is standing in front of a large window with multiple panes. The background is slightly blurred, showing an indoor setting with light coming from the window.

**GET IT RIGHT
THE FIRST TIME.
EVERY TIME.**




TEROSON VR 10

Cleaner with a gentle touch

TEROSON VR 10 is a transparent cleaner / degreaser pre-treatment liquid for bonding and sealing applications. Contains no chlorinated hydrocarbons and is not harmful to car paints when used on a short-term basis. TEROSON VR 10 will not inhibit the curing of adhesive/sealants. Applied and wiped off with a non-woven tissue or similar.

- Promotes adhesion and sealing
- Contains no chlorinated hydrocarbons
- Universal application
- Not harmful to car paints
- Will not inhibit curing
- Easily applied

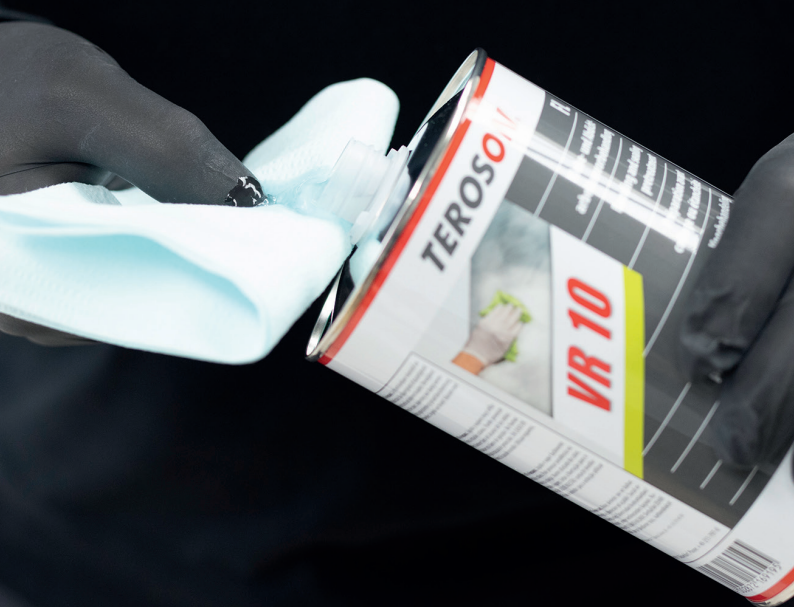





BONDERITE M-NT 1455


Wipe on a new coating

BONDERITE M-NT 1455 wipes are ready-to-use and make metal pre-treatment processes fast and easy. Enhance adhesion of paint or sealing materials and improve corrosion resistance for subsequent paint process. Ideally used for metal surface conversion on bare metal, including aluminium, thanks to excellent corrosion prevention properties. Chromium-free and easily disposable with very low VOC-content.

- Ready-to-use wipes, no application equipment required
- Excellent corrosion prevention
- Provides better adhesion of paint and sealing materials
- Time-saving (no wash primer or etch primer, no cleaning/rinsing afterwards)
- Works on aluminium
- Quick flash-off time

SAFETY EQUIPMENT

1. Goggles
2. Gloves

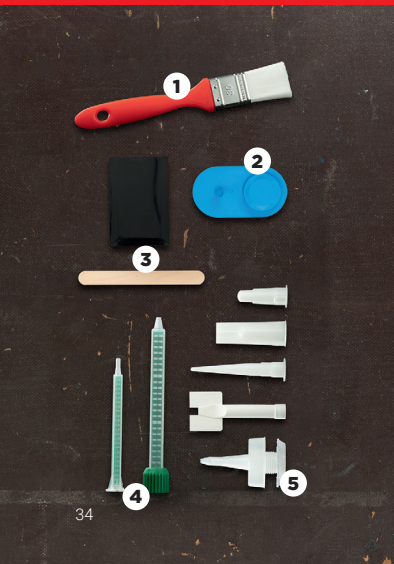

SUPPORTING EQUIPMENT

FOR REBUILD & REPLACE

1. Brush
2. Cartridge Opener
3. Spreaders
4. Static Mixer, small & big
5. Nozzles for MS 9320 SF

CLEANING AND PRE-TREAT- MENT

1. BONDERITE M-NT 1455
2. TEROSON VR 10



PISTOLS

1. TEROSON ET Battery
2. TEROSON ET Powerline II Air Pressure
3. TEROSON ET Hand
4. TEROSON ET Multipress
5. TEROSON ET Staku Hand
6. TEROSON UNIVERSAL UBC
7. TEROSON STANDARD UBC